

3

- 1. The fuel kit is supplied pre assembled and only requires simple fixing to the bike.
- 2. Remove the original assembly complete from the petrol tank.
- 3. Locate the Fuel Filler Body Gasket.
  Ducati (#8) Yamaha(#5). Position the seal
  in the recess on the underside of the main body (#2). The
  petroleum jelly is there to temporary hold the seal in place whilst
  fitting.
- 4. VERY carefully lower the assembly into place without disturbing the seal. Loosely fit the M5 x 20mm (#7) cap head bolts into position and tighten down evenly. This will compress the Body Sealing O-Ring to the spout of the tank forming a fluid tight seal.
- 5. The fuel filler kit is now ready for use. NEVER over tighten the cap (#1). Only a gentle twist is needed for a positive seal. The O-Ring (#3) is there to prevent over tightening.

## N.


The seals are made from a special material called Viton which is designed for petroleum use. NEVER substitute these seals with anything else.

Remove the rubber grommet from the fuel tank if present. This is not required in this installation and if left on, in extreme circumstances could cause a vacuum in the fuel tank.

DO NOT use with the O-Rings removed.

SAFETY is of paramount importance. Please ensure this product is correctly fitted and tested before using your motorcycle.

2

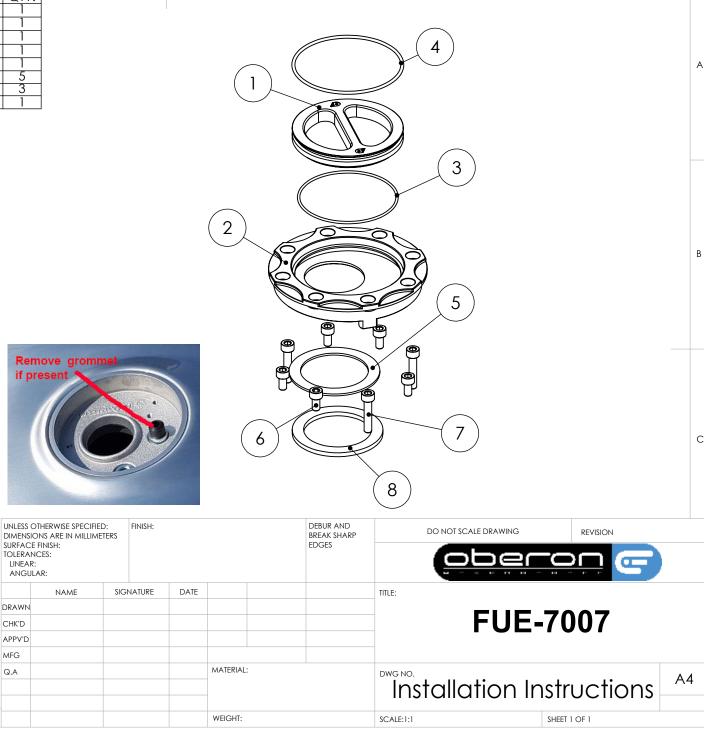

5

6